


TABLE 2 PARKING TABLE AND DIAGRAM

A	B	C	D	E	F	G
Parallel	8'0"		12.0	22.0	20.0	2
20°	8'0"	13.6	11.0	23.4	24.6	1
	8'6"	14.1	11.0	24.9	25.1	
	9'0"	14.6	11.0	26.3	25.6	
	9'6"	15.1	11.0	27.8	26.1	
30°	10'0"	15.5	11.0	29.2	26.5	1
	8'0"	16.0	11.0	16.0	27.0	
	8'6"	16.4	11.0	17.0	27.4	
	9'0"	16.8	11.0	18.0	27.8	
45°	9'6"	17.3	11.0	19.0	28.3	3
	10'0"	17.7	11.0	20.0	28.7	
	8'0"	18.4	14.0	11.3	32.4	
	8'6"	18.7	13.5	12.0	32.2	
60°	9'0"	19.1	13.0	12.7	32.1	3
	9'6"	19.4	13.0	13.4	32.4	
	10'0"	19.8	13.0	14.1	32.8	
	8'0"	19.7	19.0	9.2	38.7	
70°	8'6"	20.0	18.5	9.8	38.5	3
	9'0"	20.3	18.0	10.4	38.3	
	9'6"	20.5	18.0	11.0	38.5	
	10'0"	20.8	18.0	11.5	38.8	
80°	8'0"	19.8	20.0	8.5	39.8	3
	8'6"	20.1	19.5	9.0	39.6	
	9'0"	20.4	19.0	9.6	39.4	
	9'6"	20.6	18.5	10.1	39.1	
90°	10'0"	20.9	18.0	10.6	38.9	3
	8'0"	19.2	25.0	8.1	44.2	
	8'6"	19.3	24.0	8.6	43.3	
	9'0"	19.4	24.0	9.1	43.4	
90°	9'6"	19.5	24.0	9.6	43.5	3
	10'0"	19.6	24.0	10.2	43.6	
	8'0"	18.0	26.0	8.0	44.0	
	8'6"	18.0	25.0	8.5	43.0	
90°	9'0"	18.0	24.0	9.0	42.0	3
	9'6"	18.0	24.0	9.5	42.0	
	10'0"	18.0	24.0	10.0	42.0	
	10'0"	18.0	24.0	10.0	42.0	

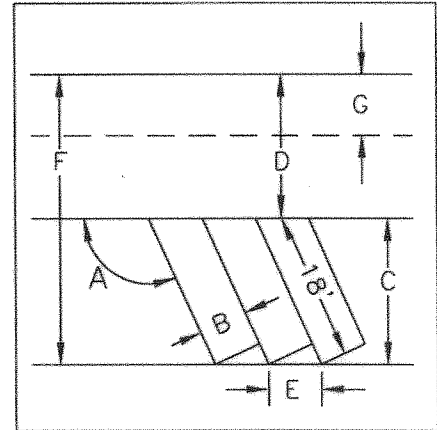

LEGEND:

- "A" EQUALS THE PARKING ANGLE,
- "B" EQUALS THE STALL WIDTH,
- "C" EQUALS THE MINIMUM STALL DEPTH,
- "D" EQUALS THE MINIMUM CLEAR AISLE WIDTH,
- "E" EQUALS THE STALL DISTANCE AT BAY SIDE,
- "F" EQUALS THE MINIMUM CLEAR BAY WIDTH, AND
- "G" IS THE MAXIMUM PERMITTED DECREASE IN CLEAR AISLE WIDTH FOR PRIVATE PARKING AREAS.

All measurements in columns (B) to (G) are in feet.
 [Adopted 98-002 §2 eff 2/11/98]